


ACCESS 165 AS

2-way component kit

- (DFS®) Dual Fiberglass Structure cone
High resistance (Power, climatic conditions, humidity...)
- Phase plug
Midrange control
- Grilles new design
Profiled

- Adjustable tweeter level
(3 positions : -3 / 0 / +3dB/oct)
Soundstage positionning
- Air core inductors
Insensitive to parasite interferences

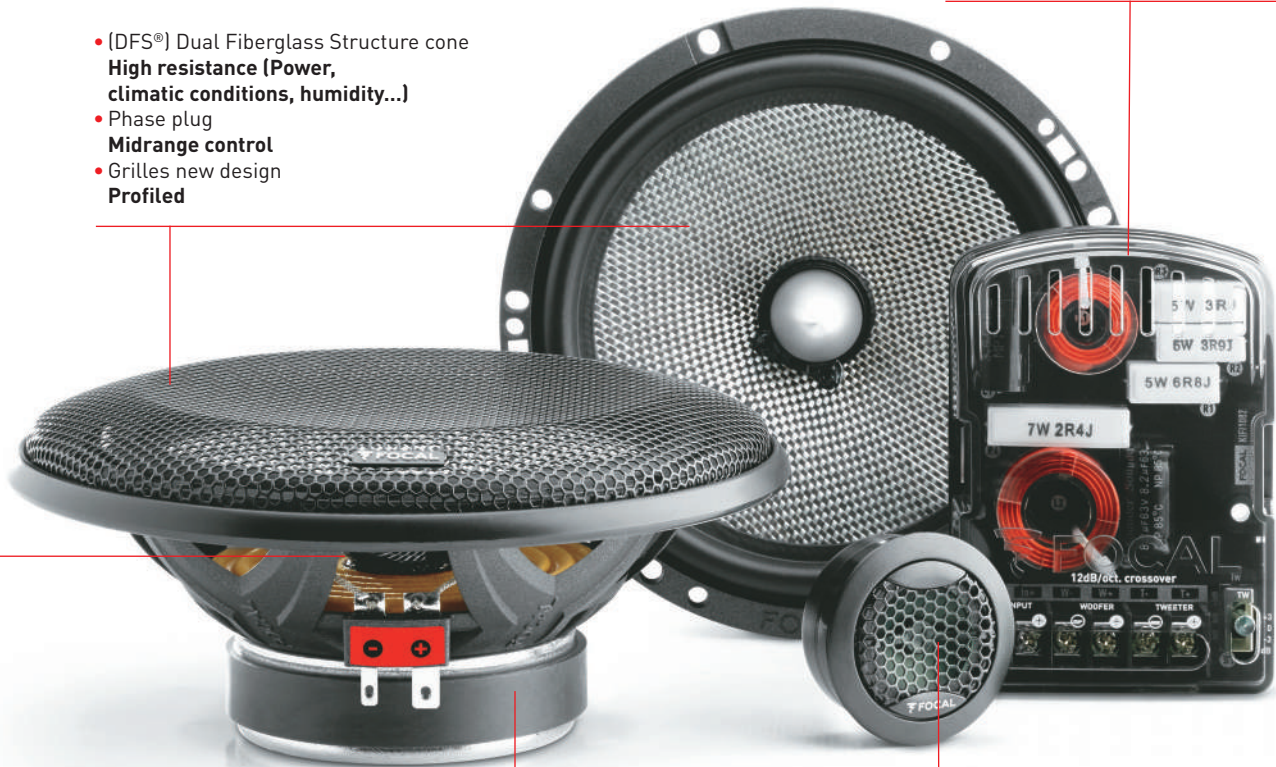

- ABS basket with 20% of fiberglass
Non magnetic, non resonant
- 25mm (1") voice coil (2 Kapton® layer)
High power handling

- 85mm magnet
High sensitivity

- Aluminum inverted dome tweeter
Accurate treble

WHAT MAKES THE DIFFERENCE

- Cone DFS® (Dual fiberglass Structure)
(climatic and power) high resistance
- High sensitivity (Direct headunit using)
- Tweeter level adjustment Extended in low frequencies

TECHNICAL CHARACTERISTICS

Woofer: 6¹/₂" (165mm)

Voice-coil diameter: 1" (25mm)

Voice-coil height: 0⁷/₁₆" (11mm)

Magnet: 3¹/₃" (85mm)

Tweeter: Aluminum inverted dome

Adjustable Tweeter level: 3 positions (-3/0/+3dB)

Crossover: 12dB/oct

Max. power: 120 Watts

Nom. power: 60 Watts RMS

Sensitivity (2.83V/1m): 91.3dB

Frequency response: 60Hz – 20kHz

Accessories: Supplied grilles

 **Performance**
CREATE YOUR SOUND

 **FOCAL**®
THE SPIRIT OF SOUND