


ACCESS 165 AC

2-way coaxial kit

- (DFS®) Dual Fiberglass Structure cone
High resistance (Power, climatic conditions, humidity...)
- Grilles new design
Profiled

- Butyl surround
Longlife
- Tilted tweeter on rotativ pod
Optimization of the sound stage

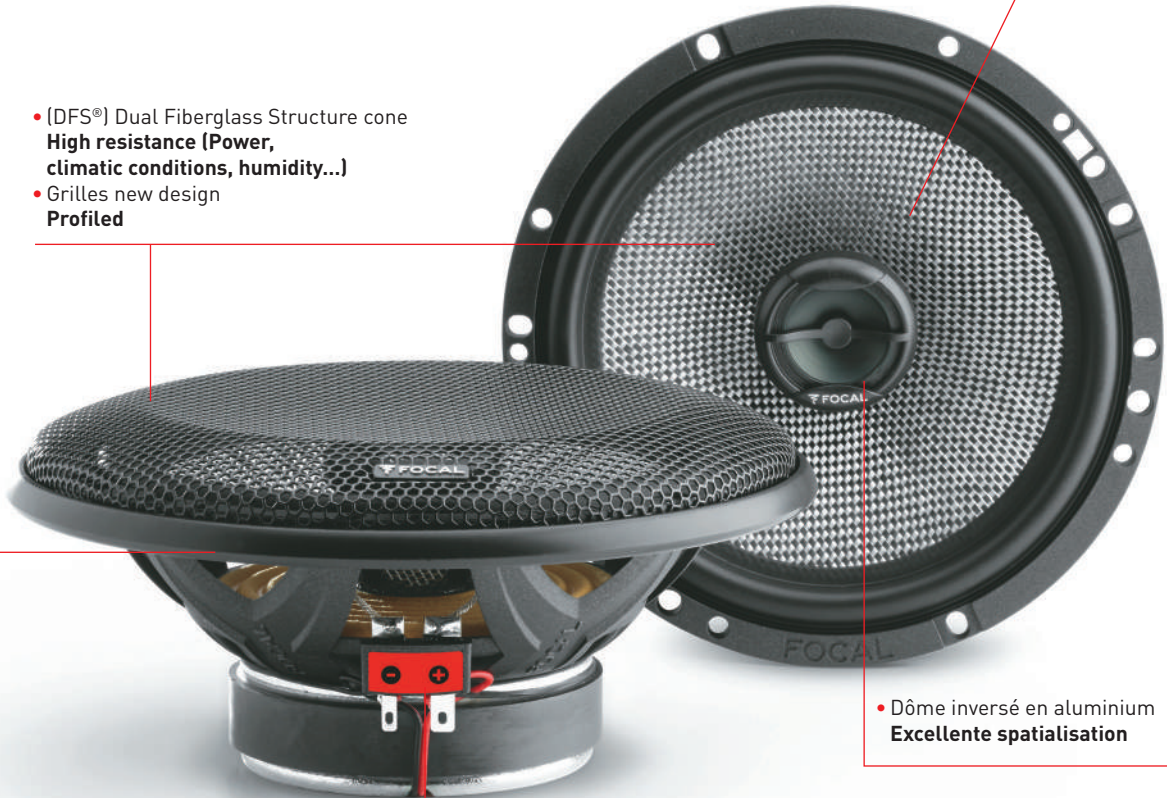

- ABS basket with 20% of fiberglass
Non magnetic, non resonant
- 25mm (1") voice coil (2 Kapton® layer)
High power handling

- 85mm magnet
High sentivity
- Integrated crossover (4.7 kHz)
Easy and quick installation

- Dôme inversé en aluminium
Excellente spatialisation

WHAT MAKES THE DIFFERENCE

- Cone DFS® (Dual fiberglass Structure)
(climatic and power) high resistance
- High sensitivity (Direct headunit using)
- High dynamique
- Rotativ tweeter

TECHNICAL CHARACTERISTICS

Woofer: 6¹/₂" (165mm)

Voice-coil diameter: 1" (25mm)

Voice-coil height: 0⁷/₁₆" (11mm)

Magnet: 3¹/₃" (85mm)

Tweeter: Aluminum inverted dome

Crossover: (4,7Khz) 6dB/oct

Max. power: 120 Watts

Nom. power: 60 Watts RMS

Sensitivity (2.83V/1m): 91dB

Frequency response: 60Hz – 20kHz

Accessories: Supplied grilles



Performance
CREATE YOUR SOUND



FOCAL
THE SPIRIT OF SOUND