


LIVE

L20 DB PRO

Subwoofer


- 200 mm (8") subwoofer
- Max. power 500 W / Nominal Power 250 W
- Impedance 2x2 Ω

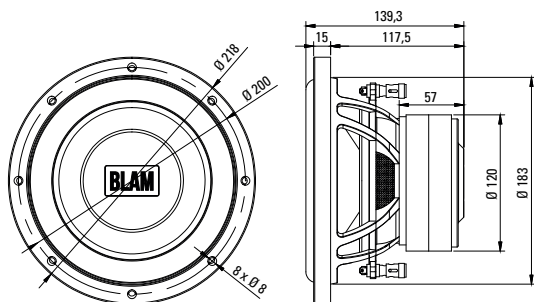

Unité en mm

TECHNICAL SPECIFICATIONS

Component	Subwoofer	
Max power	500 W	
Nominal power	250 W	
Impedance	2 x 2 Ω	
Freq. Response	45 Hz - 500 Hz	
Sensitivity (2,83V/1m)	86.6 dB	
Magnet	Ferrite Y30	
Magnet size $\varnothing$ x h	2 x 120 x 40 mm	2 x 4.724" x 1.575"
Total driver displacement	1 l	0.035 cf
Weight of one component	4 kg	8.818 lb
Voice coil $\varnothing$	50 mm	1.969"
Voice coil height	26 mm	1.024"
Cone	Rigid treated paper	

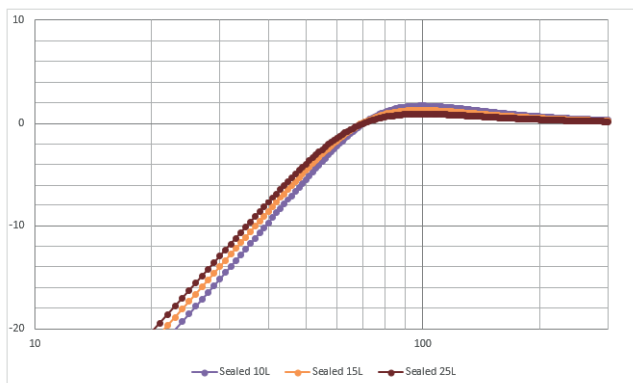

BLAM

FRENCH SOUND

Driven by passion.



THIELE-SMALL PARAMETERS

effective $\varnothing$ (d)	160 mm
Sd	201.06 cm ²
Xmax	9 mm
Re	3.8 Ω
Fs	58.59 Hz
Le	2.13 μ H @ 1 kHz
L2	0.84 μ H @ 10 kHz
Vas	6.377 L
Mms	62.3 g
Cms	0.113 m/N
BL	9.63 Tm
Qts	0.84
Qes	0.94
Qms	7.93

RECOMMENDED ENCLOSURES

Internal volume Vb	F-3dB	Boost
10 L	58 Hz	1.7 dB at 100 Hz
15 L	55 Hz	1.3 dB at 99 Hz
25 L	54 Hz	0.9 dB at 99 Hz

contact@blam-audio.fr
www.facebook.com/blamaudio
www.blam-audio.com